



Overview of fuel assembly decontamination procedures


① Fuel assembly laid on its side

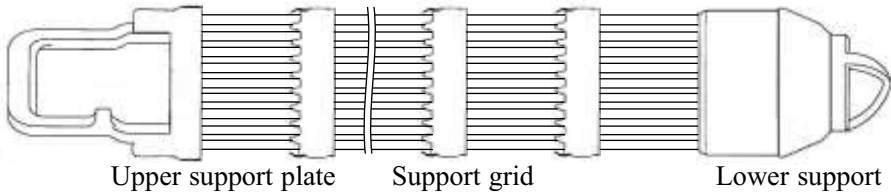


② Remove upper support plate

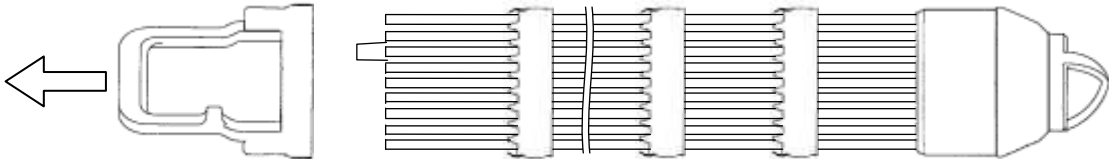


③ Pull out one fuel rod

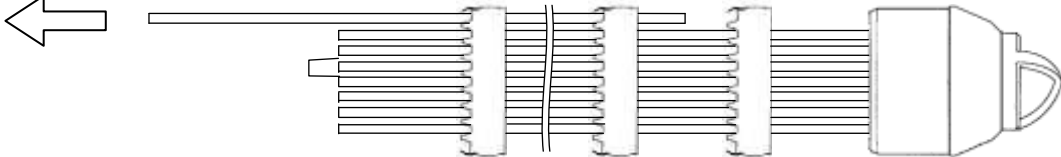

④ Decontaminate fuel rod surface (wipe with cloth)

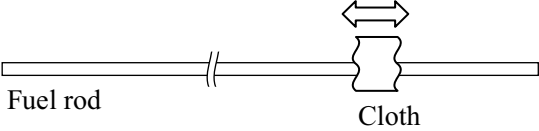


⑤ Insert the fuel rods one by one into new support grid and lower support plate

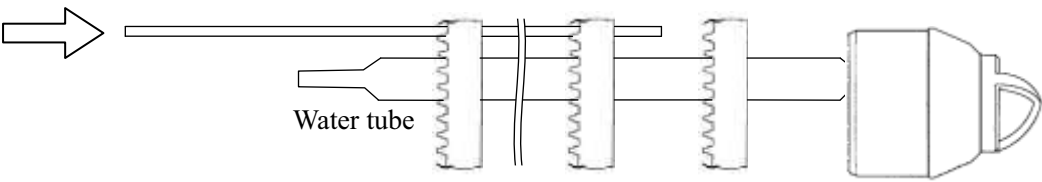

⑥ Repeat steps ③~⑤ for all fuel rods

⑦ Install new upper support plate

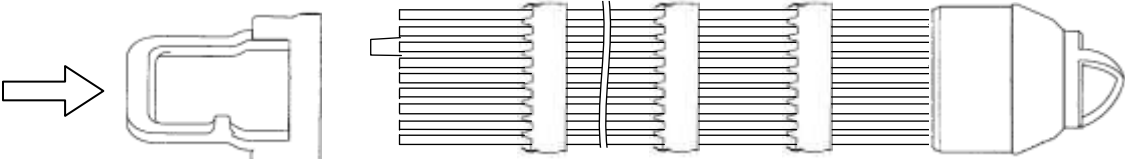

⑧ Assembly completed

